

Matterhorn RDF Datamodel

The Matterhorn RDF Datamodel is developed by the [State Archives Canton of Wallis](#) and [docuteam](#). It is based both on the ICA-standards for descriptive metadata (now ISAD/ISAAR/ISDF, in the future Records in Context (RiC)) and the OAIS Information Model. There are currently two different approaches to implement the RiC conceptual model:


- **EGAD's nongeneric approach:** Developing an RDF standard specific to archives, with gateways to library and museum standards. The development of Records in Context Ontology (RiC-O) is a very slow process due to EGADs lacking resources. In december 2018 the EGAD opened a ["RiC-O Call for reviewers"](#), which is open until April 2019. It is important to give the EGAD the feedback it is looking for!
- **The Matterhorn RDF Data Model's generic approach:** The RiC conceptual model and the OAIS Information Model are implemented with existing ontologies, nothing new is being created. The basis for our implementation is the [PREMIS3-ontology](#).

The Matterhorn RDF Data Model follows the [best practices propagated by the W3C](#): «It is best practice to use or extend an existing vocabulary before creating a new vocabulary.» Matterhorn RDF is based on ontologies that are popular and have a large user base, that are maintained and have versioning policies. All vocabularies are attached to organizations, institutions or committees that ensure continuity over the long run.

Conceptual Model

The conceptual model describes the main entities of the Matterhorn RDF Datamodel and the relationships between the entities. The naming both of the entities and relationships is for better illustration and has nothing to do with the actual implementation.


Conceptual Model

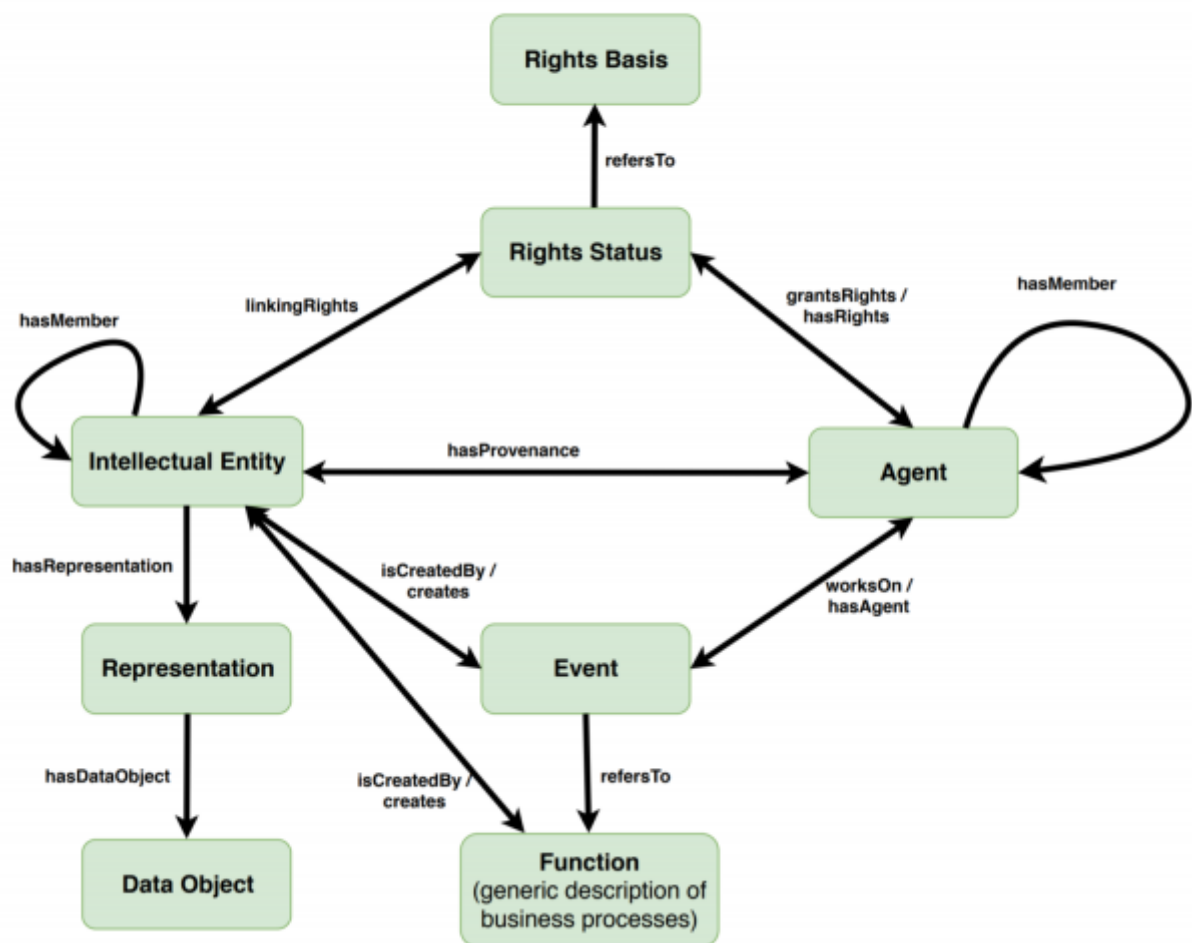

Classes

The class model of Matterhorn RDF is mainly based on the Premis 3 ontology and the library standard RDA (but not the FRBR data model). The Premis-Classes are enriched with attributes from other ontologies (mainly DC and RDA) to be able to model descriptive metadata.

Classes

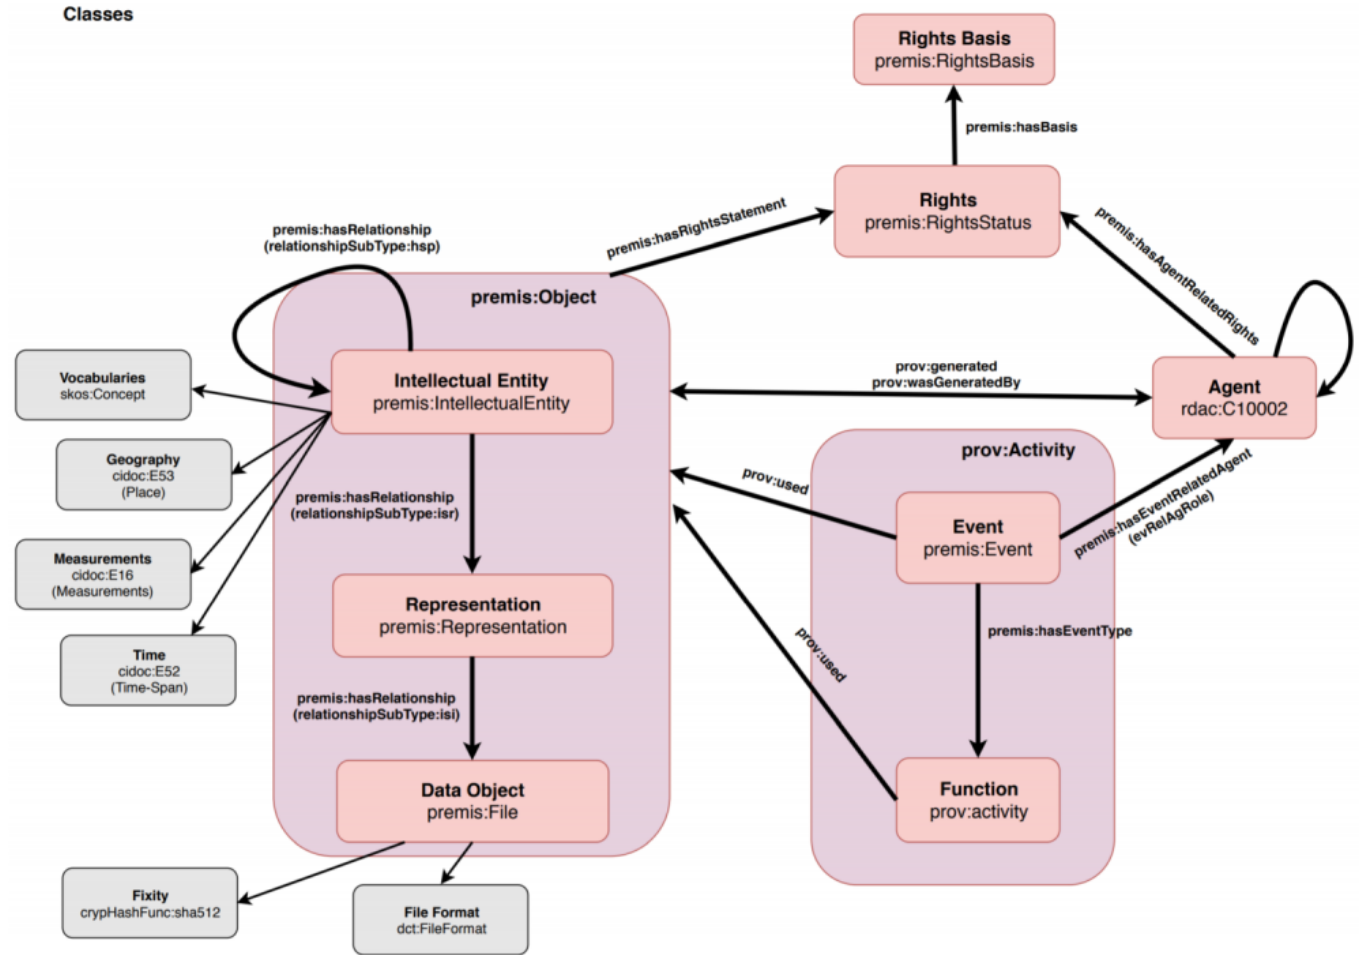

Namespaces

Name	Prefix	URI
Business Process Model and Notation	bpmn	http://dkm.fbk.eu/index.php/BPMN_Ontology#
CIDOC Conceptual Reference Model	cidoc	http://www.cidoc-crm.org/cidoc-crm/
Cryptographic Hash Functions	crypHashFunc	http://id.loc.gov/vocabulary/preservation/cryptographicHashFunctions/
Dublin Core	dc	http://purl.org/dc/elements/1.1/
DC Terms	dct	http://purl.org/dc/terms/
LoC Event Relations Agent Role	evRelAgRole	http://id.loc.gov/vocabulary/preservation/linkingAgentRoleEvent/
LoC Event Type	evType	http://id.loc.gov/vocabulary/preservation/eventType/
Ebucore	ebucore	http://www.ebu.ch/metadata/ontologies/ebucore/ebucore#
OWL	owl	http://www.w3.org/2002/07/owl#
Pronom	pronom	http://reference.data.gov.uk/technical-registry/
Provenance-Family PROV	prov	http://www.w3.org/ns/prov#
Premis	premis	http://id.loc.gov/vocabulary/preservation
RDA Unconstrained properties	rdau	http://rdaregistry.info/Elements/u/

Name	Prefix	URI
RDA Class hierarchies	rdac	http://rdaregistry.info/Elements/c/
RDF	rdf	http://www.w3.org/1999/02/22-rdf-syntax-ns#
LoC Relations Sub Type LOC	relSubType	http://id.loc.gov/vocabulary/preservation/relationshipSubType/
SKOS Simple Knowledge Organization System	skos	http://www.w3.org/2004/02/skos/core#
Time Ontology in OWL	time	http://www.w3.org/2006/time#

(Searching for namespaces? Go to <http://prefix.cc>)

Classes

Intellectual Concept	Class
Activity	prov:Activity
Agent	rdac:C10002
Event (Subclass of prov:Activity)	premis:Event
File Format	dct:FileFormat
Fixity Information	premis:fixity
Data Object (Subclass of premis:Object)	premis:File
Intellectual Entity (Subclass of premis:Object)	premis:IntellectualEntity
Representation (Subclass of premis:Object)	premis:Representation
Rights	premis:RightsStatus
Rights Basis	premis:RightsBasis

Activity

An activity is a generic term for work that a person or an organization performs. An activity can be atomic or non-atomic (compound). The types of activities that are a part of a Process Model are: Process, Sub-Process, and Task.

Class: prov:Activity

Property	Values	Standard
bpmn:has_activity_activity_type	Literal (Process, Sub-Process, Task)	ISDF 1.1 Function Type
dc:title	Literal	ISDF 1.2 Name
dct:alternative	Literal	ISDF 1.3 Parallel Name; ISDF 1.4 Other Name

Property	Values	Standard
bpmn:has_BPMN_element_category	Literal	ISDF 1.5 Classification (classify the function according to a classification scheme)
dc:date	Literal	ISDF 2.1 Date (identify the date or range of dates of the function)
dct:issued	Literal	ISDF 2.1 Date of issuance / enactment of the activity
dct:valid	Literal	ISDF 2.1 Date (often a range) of validity of an activity
bpmn:has_BPMN_element_documentation	Literal	ISDF 2.2 Description
rdau:P60491	Literal	ISDF 2.3 History; RDA „has history of the resource“
dct:rights	Literal	ISDF 2.4 Legislation
pcdm:hasRelatedObject	URI of linked bpmn:activity (via its bpmn:has_BPMN_element_id)	ISDF 3.1 Related activity
bpmn:has_BPMN_element_id	Literal	ISDF 4.1 Function Identifier
bpmn:has_activity_performers	Literal or URI of premis:agent	ISDF 4.2 Responsible Agent
dct:conformsTo	Literal	ISDF 4.3 Rules & Conventions
dct:hasVersion	Literal	ISDF 4.4 Status of description (draft, final)
dct:language	Literal	ISDF 4.7 Language of description
dct:source	Literal	ISDF 4.8 Sources consulted for description
dct:modified	Literal	ISDF 4.9 Maintenance notes

Agent

The „Agent“-class of RDA (rdac:C10002) can be divided into the subclasses Person (rdac:C10004), Corporate Body (rdac:C10005) and Family (rdac:C10008), see: <https://www.rdaregistry.info/rgAbout/rdaont/ontHierarchies.html>. The Matterhorn RDF-model includes only the top class rdac:C10002 and describes it with unconstrained RDAU-properties. It's of course open to the user to divide rdac:C10002 into its subclasses if more granularity is needed.

Class: rdac:C10002

Property	Values	Standard
rdau:P60047	Literal (person, family, organization, software, algorithm, AI)	ISAAR 1.1 Type of entity; RDA „has type of agent“
rdau:P60368	Literal	ISAAR 1.2 Name; RDA „has name of agent“
rdau:P60119	Literal	ISAAR 1.3, 1.5; RDA „has variant name for corporate body“
rdau:P60549	Literal	ISAAR 1.4; RDA „has preferred name for agent“
rdau:P60053	Literal (e.g. UUID)	ISAAR 1.6; RDA „has identifier for agent“
rdau:P60524	Literal	ISAAR 2.1; RDA „has date of establishment“
rdau:P60525	Literal	ISAAR 2.1; RDA „has date of termination“
rdau:P60599	Literal	ISAAR 2.1; RDA „has date of birth“
rdau:P60598	Literal	ISAAR 2.1; RDA „has date of death“
rdau:P60484	Literal	ISAAR 2.2; RDA „has agent history“
rdau:P60325	Literal	ISAAR 2.3; RDA „has place associated with agent“
rdau:P60370	Literal	ISAAR 2.4-2.6; RDA „has other designation associated with agent“
dct:conformsTo	Literal	ISAAR 4.3 Rules & Conventions
dct:hasVersion	Literal	ISAAR 4.4 Status of description (draft, final)
dct:language	Literal	ISAAR 4.7 Language of description
dct:source	Literal	ISAAR 4.8 Sources consulted for description
dct:modified	Literal	ISAAR 4.9 Maintenance notes

Event

Class: [premis:Event](#)

Property	Values	Standard
dc:date	Literal	
premis:hasEventType	Literal or URI of bpmn:Activity	
premis:hasOutcome	Literal	
premis:hasOutcomeNotes	Literal	
evRelAgRole:exe	Literal or URI of Agent	Executing Software
evRelAgRole:aut	Literal or URI of Agent	Authorizing Agent
prov:used	URI of premis:Object	

File Format

Class: [dct:FileFormat](#)

Fixity-information is attached to a data object [premis:file](#).

Property	Values	Standard
rdfs:label	Literal	File format name
premis:version	Literal	File format version
premis:note	Literal	File format notes

Fixity

Class: The LoC classes for [cryptographic hash functions](#) like [cryptHashFunc:md5](#) or [cryptHashFunc:sha512](#) are subclasses of [premis:fixity](#).

Fixity-information is attached to a data object [premis:file](#).

Property	Values	Standard
rdf:value	Literal	Value of message digest algorithm
dct:creator	Literal or URI of Agent	Message digest originator

Object, Representation and File

Class: [premis:Object](#) and subclasses [premis:IntellectualEntity](#), [premis:Representation](#), [premis:File](#)

ISAD(G)

Property	Values	Standard	Accessor	EAD 2002
rdau:P60049	Literal either „root“ or „node“	categorization		
premis:objectCategory	Literal either „IntellectualEntity“, „Representation“ or „File“			
dc:identifier	Literal	ISAD 1.1	refCode	EAD:did/EAD:unitid[@type = 'refCode']
dc:title	Literal	ISAD 1.2; RDA „has title“	unitTitle	EAD:did/EAD:unittitle[@label = 'main']
rdau:P60493	Literal	ISAD 1.2; RDA „has other title information“	unitTitleAdditional	EAD:did/EAD:unittitle[@label = 'additional']
rdau:P60515	Literal	ISAD 1.2; RDA „has title proper“	unitTitleOriginal	EAD:did/EAD:unittitle[@label = 'original']
rdau:P60355	Literal	ISAD 1.2; RDA „has variant title“	unitTitleVarying	EAD:did/EAD:unittitle[@label = 'varying']
rdau:P60597	Literal	ISAD 1.2; RDA „has key title“	uniformTitle	EAD:did/EAD:unittitle[@label = 'uniform']
dc:date	Literal	ISAD 1.3	date	EAD:did/EAD:unitdate[@label = 'date']
time:hasBeginning	Literal	ISAD 1.3	from	
time:hasEnd	Literal	ISAD 1.3	to	
dc:type	Literal	ISAD 1.4	otherLevelName	[@level = 'otherlevel']/@otherlevel
rdau:P60550	Literal	ISAD 1.5; RDA „has extent“	extent	EAD:did/EAD:physdesc/EAD:extent[not(@type)]

Property	Values	Standard	Accessor	EAD 2002
rdau:P60134	Literal	ISAD 1.5; RDA „has note on extent of resource“	extentNote	EAD:did/EAD:physdesc/EAD:extent[@type = 'note']
rdau:P60539	Literal	ISAD 1.5; RDA „has dimensions“	dimensions	EAD:did/EAD:physdesc/EAD:dimensions
rdau:P60159	Literal	ISAD 1.5; RDA „has applied material“	material	EAD:did/EAD:physdesc/EAD:physfacet
prov:wasGeneratedBy	Literal or URI of rdac:C10002	ISAD 2.1	origination	
rdau:P60484	Literal	ISAD 2.2; RDA „has agent history“	biographicalHistory	EAD:bioghist/EAD:p
rdau:P60176	Literal	ISAD 2.3; RDA „has custodial history of resource“	archivalHistory	EAD:custodhist/EAD:p
rdau:P60583	Literal	ISAD 2.4; RDA „„has immediate source of acquisition of resource“„	accessNr (eigentlich acquisitionInfo)	EAD:acqinfo/EAD:p
dc:description	Literal	ISAD 3.1	scopeContent	EAD:scopecontent/EAD:p
dct:accrualPolicy	Literal	ISAD 3.2	appraisalAndDestruction	EAD:appraisal/EAD:p
dct:accrualMethod	Literal	ISAD 3.3	accruals	EAD:accruals/EAD:p
rdau:P60348	Literal	ISAD 3.4; RDA „has system of organization“	arrangement	EAD:arrangement/EAD:p
premis:hasRightsGranted	Literal or URI of premis:RightsStatement	ISAD 4.1	accessRestriction	EAD:accessrestrict[@type = 'restrictions']/EAD:p
premis:hasRightsGranted	Literal or URI of premis:RightsStatement	ISAD 4.2	conditionsOfReproductions	EAD:userrestrict/EAD:p
dct:language	Literal	ISAD 4.3	language	EAD:did/EAD:langmaterial/EAD:language
rdau:P60528	Literal	ISAD 4.4; RDA „has equipment or system requirement“	characteristics	EAD:phystech/EAD:p
rdau:P60262	Literal	ISAD 4.5; RDA „is finding aid“	findingAids	EAD:otherfindaid/EAD:p
dct:isVersionOf	Literal or URI of pcdm:object	ISAD 5.1	locationOfOriginals	EAD:originalsloc/EAD:p
rdau:P60272	Literal or URI of pcdm:object	ISAD 5.2; RDA „is reproduced as“	reproductions	EAD:altformavail/EAD:p
pcdm:hasRelatedObject	URI of pcdm:object	ISAD 5.3	relatedMaterial	EAD:relatedmaterial/EAD:p
rdau:P60333	Literal	ISAD 5.4; RDA „has publication statement“	bibliography	EAD:bibliography/EAD:p
rdau:P60470	Literal	ISAD 6.1; RDA „has note on resource“	comment	EAD:note/EAD:p
dct:conformsTo	Literal	ISAD 7.2 Rules & Conventions	descriptionRules	EAD:processinfo[@type = 'rules']/EAD:p
dct:modified	Literal	ISAD 7.3		

Non-ISAD(G)-properties for objects

Property	Values	Standard	Accessor	EAD 2002
dct:format	Literal	Dateifformat	format	EAD:did/EAD:physdesc[@label = 'format']
rdau:P60073	Literal	RDA „has date of publication“		
rdau:P60163	Literal	RDA „has place of publication“		
rdau:P60518	Literal	RDA „Relates a work to a chronological or geographic coverage of the content of a resource.“; rdaw:P10216		
rdau:P60061	Literal	RDA „Has host institution“; rdaw:P10007	institution	EAD:controlaccess/EAD:corpname
rdau:P60203	Literal or URI of pcdm:object	RDA „is abstracted as“	abstract	EAD:did/EAD:abstract
rdau:P60434	Literal	RDA „has author“	author	EAD:controlaccess/EAD:persname[@role = 'author']
rdau:P60444	Literal	RDA „has publisher“	publisher	EAD:controlaccess/EAD:name[@role = 'publisher']
rdau:P60483	Literal	RDA „has granting institution or faculty“	fundingSource	EAD:controlaccess/EAD:name[@role = 'fundingSource']
pcdm:hasMember	URI of pcdm:object	Link to Childelements		

Technical Metadata for objects

Property	Values	Standard
ebucore:filename	Literal	File name
premis:hasCompositionLevel	Literal	
ebucore:fileSize	Literal	File size in Byte
ebucore:dateCreated	Literal	create date
ebucore:dateModified	Literal	last modified date
ebucore:hasMimeType	Literal	MIME-Type
premis:hasOriginalName	Literal	original name of file
premis:formatRegistryName	Literal	referred file registry
premis:formatRegistryKey	Literal	PUID within the file registry
premis:formatName	Literal	File format name

Property	Values	Standard
premis:formatVersion	Literal	File format version
premis:messageDigestAlgorithm	Literal	
premis:messageDigest	Literal	
premis:hasCreatingApplicationName	Literal	Application used to create the file
premis:hasCreatingApplicationVersion	Literal	Application version used to create the file

Rights

Class: `premis:RightsStatus`

Property	Values	Standard	Accessor	EAD 2002
premis:allows	Literal			
premis:hasBasis	Literal or URI of <code>premis:RightsBasis</code>	Rechtliche (oder andere) Grundlage		
premis:endDate	Literal			
premis:prohibits	Literal			
premis:startDate	Literal			


Rights Basis

Class: `premis:RightsBasis`

Specifies the rights basis of any rights statement that is expressed in `premis:RightsStatus`. To describe copyrights, licences, statute (law that grants or revokes rights) or institutional policies use the respective PREMIS Subclasses.

Property	Values	Standard
premis:jurisdiction	Literal or URI	Jurisdiction to which the rights basis applies
premis:note	Literal	Free-text note about the rights basis

Example

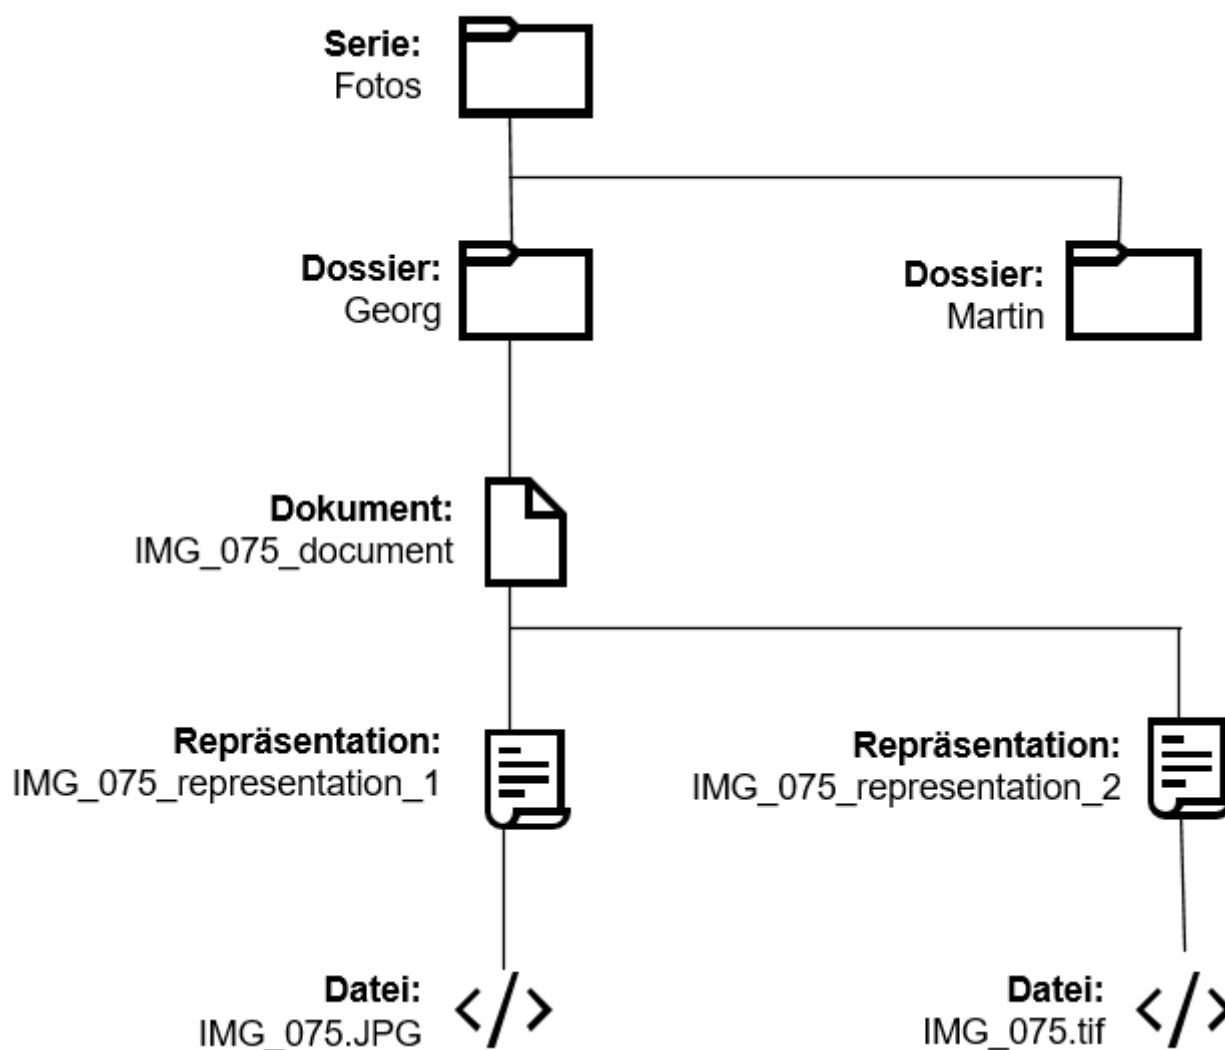

```

@prefix cryptoHashFunc:
<http://id.loc.gov/vocabulary/preservation/cryptographicHashFunctions> .
@prefix dct: <http://purl.org/dc/terms/> .
@prefix dc: <http://purl.org/dc/elements/1.1/> .
@prefix ebucore: <http://www.ebu.ch/metadata/ontologies/ebucore/ebucore#> .
@prefix evRelAgRole:
<http://id.loc.gov/vocabulary/preservation/linkingAgentRoleEvent/> .
@prefix evType: <http://id.loc.gov/vocabulary/preservation/eventType> .
@prefix owl: <http://www.w3.org/2002/07/owl#> .
@prefix premis: <http://id.loc.gov/vocabulary/preservation/> .
@prefix pronom: <http://reference.data.gov.uk/technical-registry/> .
@prefix prov: <http://www.w3.org/ns/prov#> .
@prefix rdac: <http://rdaregistry.info/Elements/c/> .
@prefix rdau: <http://rdaregistry.info/Elements/u/> .
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix rdfs: <http://www.w3.org/2000/01/rdf-schema#> .
@prefix relSubType:
<http://id.loc.gov/vocabulary/preservation/relationshipSubType/> .
@prefix time: <http://www.w3.org/2006/time#> .

```

```
# ===== intellectual entities
<_20180417150218369> a premis:IntellectualEntity ;
    ebucore:filename "Fotos" ;
    relSubType:hsp <_20180417150218421> ;
    relSubType:hsp <_20180417150218728> ;
    dc:title "Titel der Serie" ;
    dc:identifier "A-01" ;
    dc:type "Serie" ;
    time:hasBeginning "20120000" ;
    time:hasEnd "20140000" ;
    dct:language "deutsch" ;
    rdau:P60484 "administrative history" ;
    rdau:P60176 "the archival history" ;
    rdau:P60583 "Source of acquisition" ;
    dc:description "ISAD 3.1 for Scope and content" ;
    dct:accrualPolicy "Appraisal" .

<_20180417150218421> a premis:IntellectualEntity ;
    ebucore:filename "Georg" ;
    relSubType:hsp <_20180417150218464> ;
    dc:title "description of the dossier" ;
    dc:type "Dossier" .

<_20180417150218728> a premis:IntellectualEntity ;
    dc:title "Martin" ;
    ebucore:filename "Martin" ;
    dc:type "Dossier" .

<_20180417150218464> a premis:IntellectualEntity ;
    relSubType:hsp <_20180417150218516> ;
    relSubType:hsp <_20180430153716970> ;
    ebucore:filename "IMG_075_document" ;
    dc:type "Dokument" ;
    dc:date "20120610" ;
    dc:title "Das ist der Titel des Dokument" ;
    prov:wasGeneratedBy <Georg_Buechler> .

# ===== representations
<_20180417150218516> a premis:Representation ;
    relSubType:isr <IMG_075_file1> ;
    ebucore:filename "IMG_075_representation_1" ;
    dc:title "Representation 1" .

<_20180430153716970> a premis:Representation ;
    relSubType:isr <IMG_075_file2> ;
    ebucore:filename "IMG_075_representation_2" ;
    dc:title "Representation 2" .

# ===== files
<IMG_075_file1> a premis:File ;
    ebucore:filename "IMG_075.JPG" ;
```

```
    premis:hasCompositionLevel "0" ;
    ebucore:hasSize "1609735" ;
    premis:hasOriginalName "IMG_075.JPG" ;
    dct:FileFormat <fmt/43> ;
    premis:hasFixity <IMG_075_file1_fixity> .

<IMG_075_file2> a premis:File ;
    ebucore:filename "IMG_075.tif" ;
    premis:hasCompositionLevel "0" ;
    ebucore:hasSize "6370960" ;
    dct:FileFormat <fmt/353> ;
    premis:hasFixity <IMG_075_file2_fixity> .

# ===== fixity
<IMG_075_file1_fixity> a crypHashFunc:sha512 ;
    rdf:value "1e0d392f890b635c507a35962b49b80e1c580ed4..." .

<IMG_075_file2_fixity> a crypHashFunc:sha512 ;
    rdf:value "5fe3a08a12e3709c11a2f4f09a4d624d60908cbe..." .

# ===== file format
<fmt/43> a dct:FileFormat ;
    rdfs:label "JPEG File Interchange Format" ;
    premis:formatVersion "1.01" ;
    ebucore:hasMimeType "image/jpeg" ;
    owl:sameAs <https://www.nationalarchives.gov.uk/pronom/fmt/42> .

<fmt/353> a dct:FileFormat ;
    rdfs:label "Tagged Image File Format" ;
    ebucore:hasMimeType "image/tiff" ;
    owl:sameAs <https://www.nationalarchives.gov.uk/pronom/fmt/353> .

# ===== events
<_20180417150218685> a evType:creation ;
    dct:date: "2018-04-17T15:02:18" ;
    evRelAgRole:exe <docuteam darc_2.18.14> ;
    evRelAgRole:aut "t.wildi" ;
    premis:hasOutcome: "Success" ;
    prov:used "IMG_075_file1" .

<_20180417150218685> a evType:creation ;
    dct:date: "2018-04-17T15:02:18" ;
    evRelAgRole:exe <docuteam darc_2.18.14> ;
    evRelAgRole:aut "t.wildi" ;
    premis:hasOutcome: "Success" ;
    prov:used "IMG_075_file2" .

# ===== agents
<Georg_Buechler> a rdac:C10002 ;
    rdau:P60047 "person" ;
```

```
rdau:P60368 "Büchler, Georg" ;
rdau:P60599 "1.1.1111" ;
rdau:P60484 "Studium: 1995-2001 Griechische Sprache und Literatur,
Klassische Archäologie und Informatik an den Universitäten Fribourg und
Athen" .
owl:sameAs <http://d-nb.info/gnd/128413468>
owl:sameAs <https://viaf.org/viaf/65058495/>

<docuteam darc_2.18.14> a rdac:C10002 ;
rdau:P60047 "software" ;
rdau:P60368 "docuteam darc" ;
dct:hasVersion "2.18.14" ;
dct:abstract "digital preservation software developped by
www.docuteam.ch, published under GPL3" .
```

From:

<https://wiki.docuteam.ch/> - **docuteam wiki**

Permanent link:

<https://wiki.docuteam.ch/doku.php?id=docuteam:matterhornrdf&rev=1545376128>

Last update: **2019/01/07 11:13**

